


# **LEFT HANDLEBAR SWITCH**



**Ref. JP PS AP009 RF**

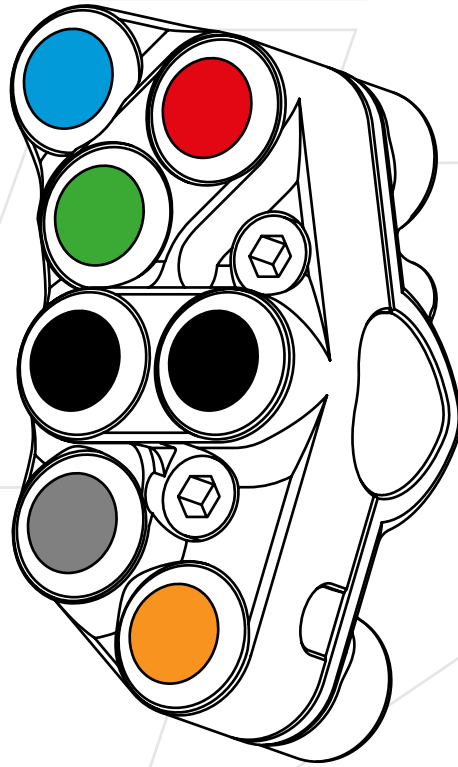

## TECHNICAL FEATURES

---

- CNC-machined anodized aluminium body
- stronger and lighter than the original part
- IP69K protection
- laser engraving
- wired with RAYCHEM 105° cable and sealed with RAYCHEM S1125 resin

## INSTALLATION

---

This product is plug-and-play, no modification is required on the bike:

1. make sure the ignition is turned off
2. disconnect and remove the original handlebar switch (refer to the manufacturer's workshop manual)
3. install the JETPRIME handlebar switch on the handlebar using the provided bolts, and tighten to 10 Nm
4. connect the wiring to the original connectors

### **NOTE**

This handlebar switch is **NOT** compatible with the V4-MP multimedia platform.

# FUNCTIONS



This handlebar switch can be used in both **STREET** and **RACING** modes. The mode selection is managed via the **MODE** button (5): when not pressed, the **STREET** mode is active; when pressed, the **RACING** mode is activated.

## STREET MODE

1. HIGH BEAMS
2. short press = JOYSTICK UP / hold 1-1.5s then release = OK
3. LEFT TURN INDICATOR (see note)
4. JOYSTICK DOWN
5. MODE
6. RIGHT TURN INDICATOR (see note)
7. HORN
8. USER - (see note)
9. CRUISE CONTROL
10. USER + (see note)
11. TRACTION CONTROL + (see note)
12. TRACTION CONTROL - (see note)

## RACING MODE

1. HIGH BEAMS
2. short press = JOYSTICK UP / hold 1-1.5s then release = OK
3. JOYSTICK LEFT
4. JOYSTICK DOWN
5. MODE
6. JOYSTICK RIGHT
7. HORN
8. USER - (see note)
9. PIT
10. USER + (see note)
11. TRACTION CONTROL + (see note)
12. TRACTION CONTROL - (see note)

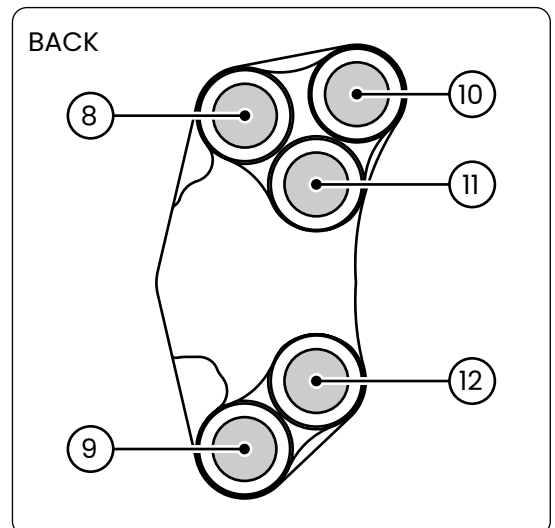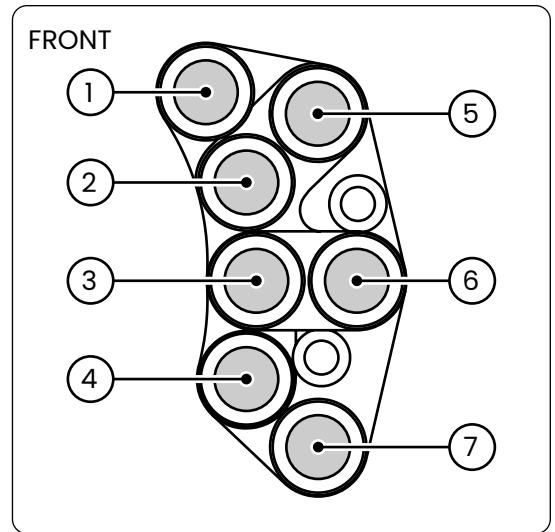

### **NOTE**

#### **Button 3 and 6**

Press once to activate the turn indicator, press again to deactivate it.

#### **Button 8 and 10**

These buttons can be used to adjust either the cruise control speed or the anti-wheeling intervention level. This configuration is selected by the user through the bike's settings menu.

#### **Button 11 and 12**

Hold them down simultaneously to activate the launch control (only if available and set to a level other than 0).



**JETPRIME S.R.L.**

Via Eugenio Montale, 1  
41016 Novi di Modena - Rovereto sulla Secchia (MO)  
Phone: +39 059 672223 - Email: info@jetprime.it

**[www.jetprimeshop.it](http://www.jetprimeshop.it)**

All JETPRIME products are designed for racing use only and should be installed by an expert.

The manufacturer, importer, or dealer shall not be liable for any damage caused by improper installation or operation of the JETPRIME product.

The warranty is limited to defects recognized by our technical department and to normal use. The warranty is void in case of accident, modification, improper or racing use.

Do not install the product on a motorcycle for which it was not designed or tested by JETPRIME.

The technical specifications of JETPRIME products and related products are subject to change without notice.